

MILKOR UBGL

UNDER BARREL GRENADE LAUNCHER



The compact lightweight design of the Milkor UBGL ensures increased weapon mobility when installed on a primary weapon. The ergonomic design allows for ease of operation with its button trigger and swing body to allow for simplified firing and cartridge ejection.



CALIBRE & ROUNDS

40 mm Low-Velocity (LV)
40 mm Less-Lethal
37/38 Less-Lethal




PRACTICAL FIRING RATE

Capable of firing 6 rounds
in a minute (Operator dependant).



EFFECTIVE RANGES

400m Low-Velocity
ammunition standard

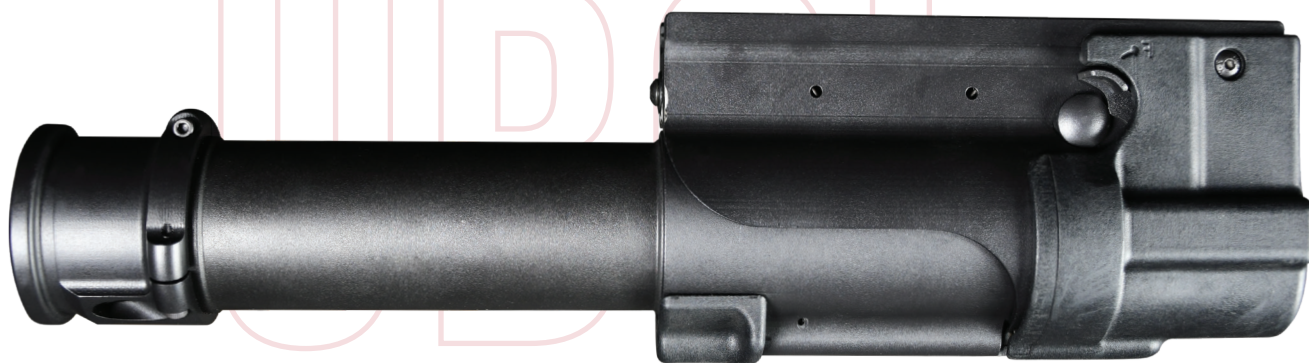

TECHNICAL SPECIFICATIONS

Calibre & Rounds	40 mm Low-Velocity (LV) 40 mm Less-Lethal 37/38 Less-Lethal
Type	Single shot
Capacity	1 Round
Firing Method	Single action button trigger
Practical Firing Rate	Capable of firing 6 rounds in a minute (Operator dependant)
Barrel Type	6 Constant 1 turn in 1200 mm (1:47.24")
*Overall length	324.5 mm with compensator 290.5 mm without compensator
Weight (Empty)	1.1 kg
Effective Range	400 m (Low-Velocity ammunition standard)
Interface	Mounted on a STANAG 4694 NATO Accessory Rail/ MIL-std-1913. Adaptive for any Assault Rifle
Standard Sight	Saddle sight
Height	91 mm
Width	60 mm

