MILKOR

AIR | LAND | SEA | CYBER

MILKOR WEAPONS

TABLE OF CONTENTS

01.
MILKOR
SUPERSIX
MRGL

02.
MILKOR
STOPPER
CONVERTIBLE

03.
MILKOR
UBGL

04.
MILKOR
MAR LAUNCHER

05.
OPERATIONAL
USE CASES AND
AMMUNITION
SUPPLY



MILKOR
SUPERSIX



SuperSix Multi-Range Grenade Launcher: 40mm weapon with high lethality, precision, and reliability. Effective in all battlefield conditions.

RATE OF FIRE
Capable of firing 6 rounds in 3 seconds (Operator dependent)

EFFECTIVE RANGES
400 m 40 x 46 mm Low-Velocity
600 m 40 X 46 mm Extended range
800 m 40 x 51 mm Medium-Velocity

TECHNICAL SPECIFICATIONS

MULTIPLE RANGE GRENADE LAUNCHER

Calibre & Rounds	*37/38 and 40 mm Less-Lethal* *40 mm Low-Velocity (LV)* *40 mm Medium-Velocity (MV)*
Type	*Multi-shot semi-automatic revolving action*
Capacity	*6 Rounds*
Firing Method	*Double action*
Barrel Type	*Progressive with 1 turn in 1200 mm final twist (1:47.24")*
****Overall length (Butt retracted/extended)***	*781 mm/859 mm with compensator* *746 mm/824 mm without compensator*
Weight (Empty)	*5.96 kg*
Accessory Rail	*STANAG 4694 NATO Accessory Rail*
Standard Sight	*Several options are available as per customer request*
Height	*220 mm with quad rail* *203 mm with sleeve grip*
Width	*163 mm*

*Specifications may vary depending on operational conditions. * Measurements are nominal.*

MILKOR

STOPPER CONVERTIBLE



Quick-reload, single-shot enforcer. Dual-use: riot control and lethal. For law enforcement, military, tactical. 40mm or 37/38mm barrel options.

RATE OF FIRE

Capable of firing 12 rounds per minute (Operator dependant)

EFFECTIVE RANGES

400 m Low-velocity ammunition standard


TECHNICAL SPECIFICATIONS

SINGLE-SHOT ENFORCER

Calibre & Rounds	*40 mm Low-Velocity (LV)* *40 mm Less-Lethal* *37/38 Less-Lethal*
Type	*Single shot*
Capacity	*1 Round*
Firing Method	*Double action*
Barrel Type	*6 Constant 1 turn in 1200 mm (1:47.24")*
****Overall length (Butt retracted/extended)***	*642 mm/720 mm with compensator* *608 mm/686 mm without compensator*
Weight (Empty)	*2.41 kg*
Accessory Rail	*STANAG 4694 NATO Accessory Rail and 2 side mounted 44 mm picatinny rails*
Standard Sight	*Several options are available as per customer request*
Height	*162 mm*
Width	*69 mm*

*Specifications may vary depending on operational conditions. * Measurements are nominal.*

MILKOR
UBGL

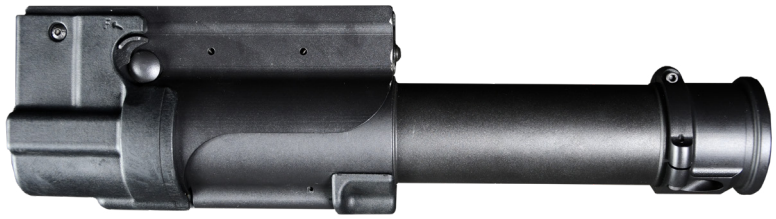

The compact lightweight design of the Milkor UBGL ensures increased weapon mobility when installed on a primary weapon. The ergonomic design allows for ease of operation with its button trigger and swing body enabling simplified firing and cartridge ejection.

WEIGHT
1.1 kg

EFFECTIVE RANGES
400 m (Low-Velocity ammunition standard)

TECHNICAL SPECIFICATIONS

UNDER BARREL GRENADE LAUNCHER

Calibre & Rounds	*40 mm Low-Velocity (LV)* *40 mm Less-Lethal* *37/38 Less-Lethal*
Type	*Single shot*
Capacity	*1 Round*
Firing Method	*Single action button trigger*
Practical Firing Rate	*Capable of firing 6 rounds in a minute (Operator dependant)*
Barrel Type	*6 Constant 1 turn in 1200 mm (1:47.24")*
****Overall length***	*324.5 mm with compensator* *290.5 mm without compensator*
Interface	*Mounted on a STANAG 4694 NATO Accessory Rail/ MIL-std-1913. Adaptive for any Assault Rifle*
Standard Sight	*Saddle sight*
Height	*91 mm*
Width	*60 mm*

*Specifications may vary depending on operational conditions. * Measurements are nominal.*

MILKOR
MAR



Manufactured specifically for anti-riot purposes with a lightweight design, the MAR can be used to effectively enforce control without compromising the lives of civilians.

WEIGHT
3.6 kg (Empty)

RATE OF FIRE
Capable of firing 6 rounds in 3 seconds (Operator dependant)

TECHNICAL SPECIFICATIONS

MULTIPLE ANTI-RIOT LAUNCHER

Calibre & Rounds	*37/38 mm Less-Lethal* *40 mm Anti-riot*
Type	*Multi-shot, Semi-automatic revolving action*
Capacity	*6 Rounds*
Firing Method	*Double action*
Barrel Type	*Progressive with 1 turn in 1200 mm final twist (1:47.24")*
****Overall length (Buttretracted/extended)***	*695 mm/770 mm*
Effective Range	*25 m – 170 m (Ammunition dependant)*
Accessory Rail	*STANAG 4694 NATO Accessory Rail*
Standard Sight	*Several options are available as per customer request*
****Height***	*250 mm (Grip dependant)*
Width	*170 mm*

*Specifications may vary depending on operational conditions. * Measurements are nominal.*

OPERATIONAL USE CASES
AND AMMUNITION SUPPLY

LETHAL APPLICATIONS

- Indirect Fire
- Area Denial
- Suppression
- Breaching

LESS LETHAL APPLICATIONS


- Riot Response
- Perimeter Defense
- Peacekeeping Operations
- Building Clearance


AMMUNITION SUPPLY

37/38 and 40mm ammunition come in a variety of forms, including:

- High Explosives
- High Explosives Dual-Purpose
- Coloured Smoke Rounds
- Practice Rounds
- Tracer Rounds
- Tear Gas Rounds
- Rubber Rounds
- Phosphorus Rounds

40mm GRENADE CHARACTERISTICS

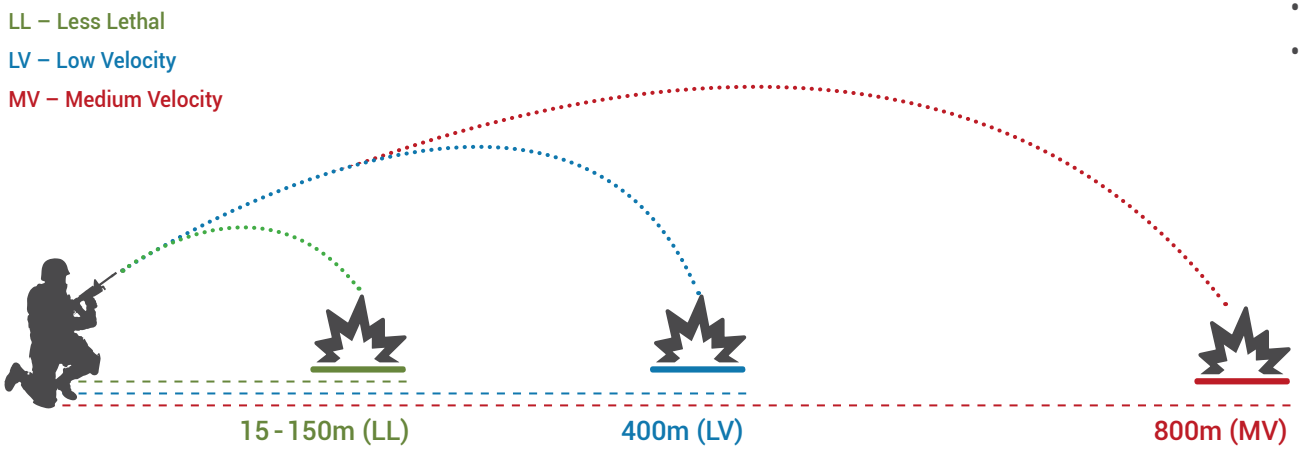

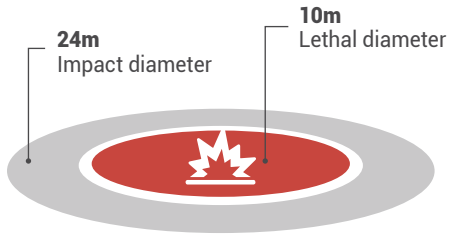

Based on 40mm LV and MV High Explosive (HE) rounds.





+971 2 552 7831 | info@milkor.ae | www.milkor.ae
Tawazun Industrial Park, Abu Dhabi United Arab Emirates, P.O Box 147011